

**AERODROME
CHART - ICAO**

ARP 543705N 0055221W

AD ELEV 15FT

**BELFAST CITY
EGAC**


RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 04/22	Grooved Asphalt	69/F/D/W/T
Terminal Stands		
Stands 1,2,9,10	Concrete	29/R/D/W/T
Stands 3-8	Concrete	48/R/D/W/T
Stand 21	Concrete	30/R/D/W/T
Stand 24	Concrete	39/R/D/W/T
Victoria Apron	Concrete	30/R/D/W/T
Taxiway A	Asphalt	50/F/D/W/T

GUND (Geoid Undulation) =
The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	99
HEIGHTS IN FEET ABOVE AD	(84)

VAR 3.2°W - 2017
N
Annual Rate of Change 0.17°E

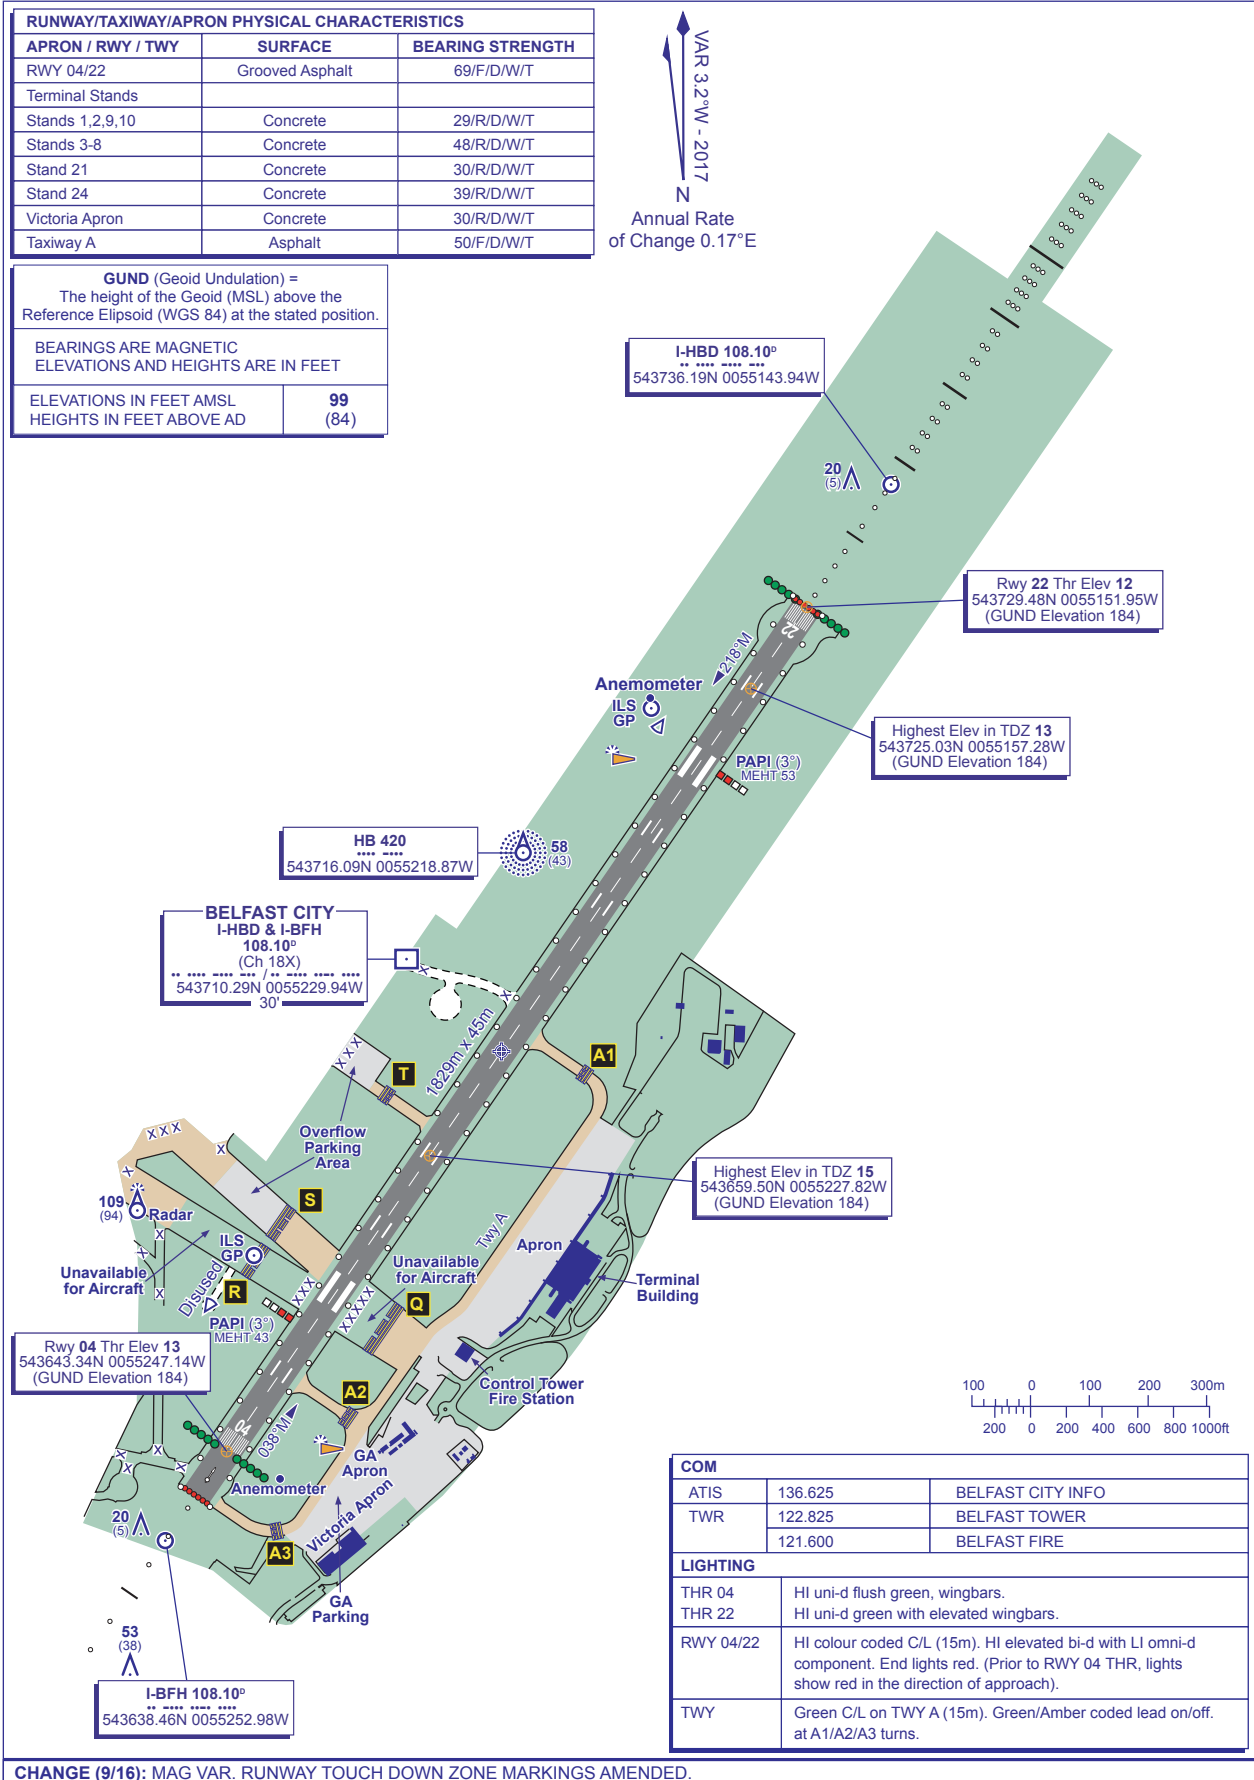

COM		
ATIS	136.625	BELFAST CITY INFO
TWR	122.825	BELFAST TOWER
	121.600	BELFAST FIRE
LIGHTING		
THR 04	HI uni-d flush green, wingbars.	
THR 22	HI uni-d green with elevated wingbars.	
RWY 04/22	HI colour coded C/L (15m). HI elevated bi-d with LI omni-d component. End lights red. (Prior to RWY 04 THR, lights show red in the direction of approach).	
TWY	Green C/L on TWY A (15m). Green/Amber coded lead on/off. at A1/A2/A3 turns.	

CHANGE (9/16): MAG VAR. RUNWAY TOUCH DOWN ZONE MARKINGS AMENDED.

AERO INFO DATE 25 MAY 16